




Motorola XOOM 2 Media Edition Microphone Replacement

This guide will explain how to replace the speakers on your device.

Written By: Jillian Cain

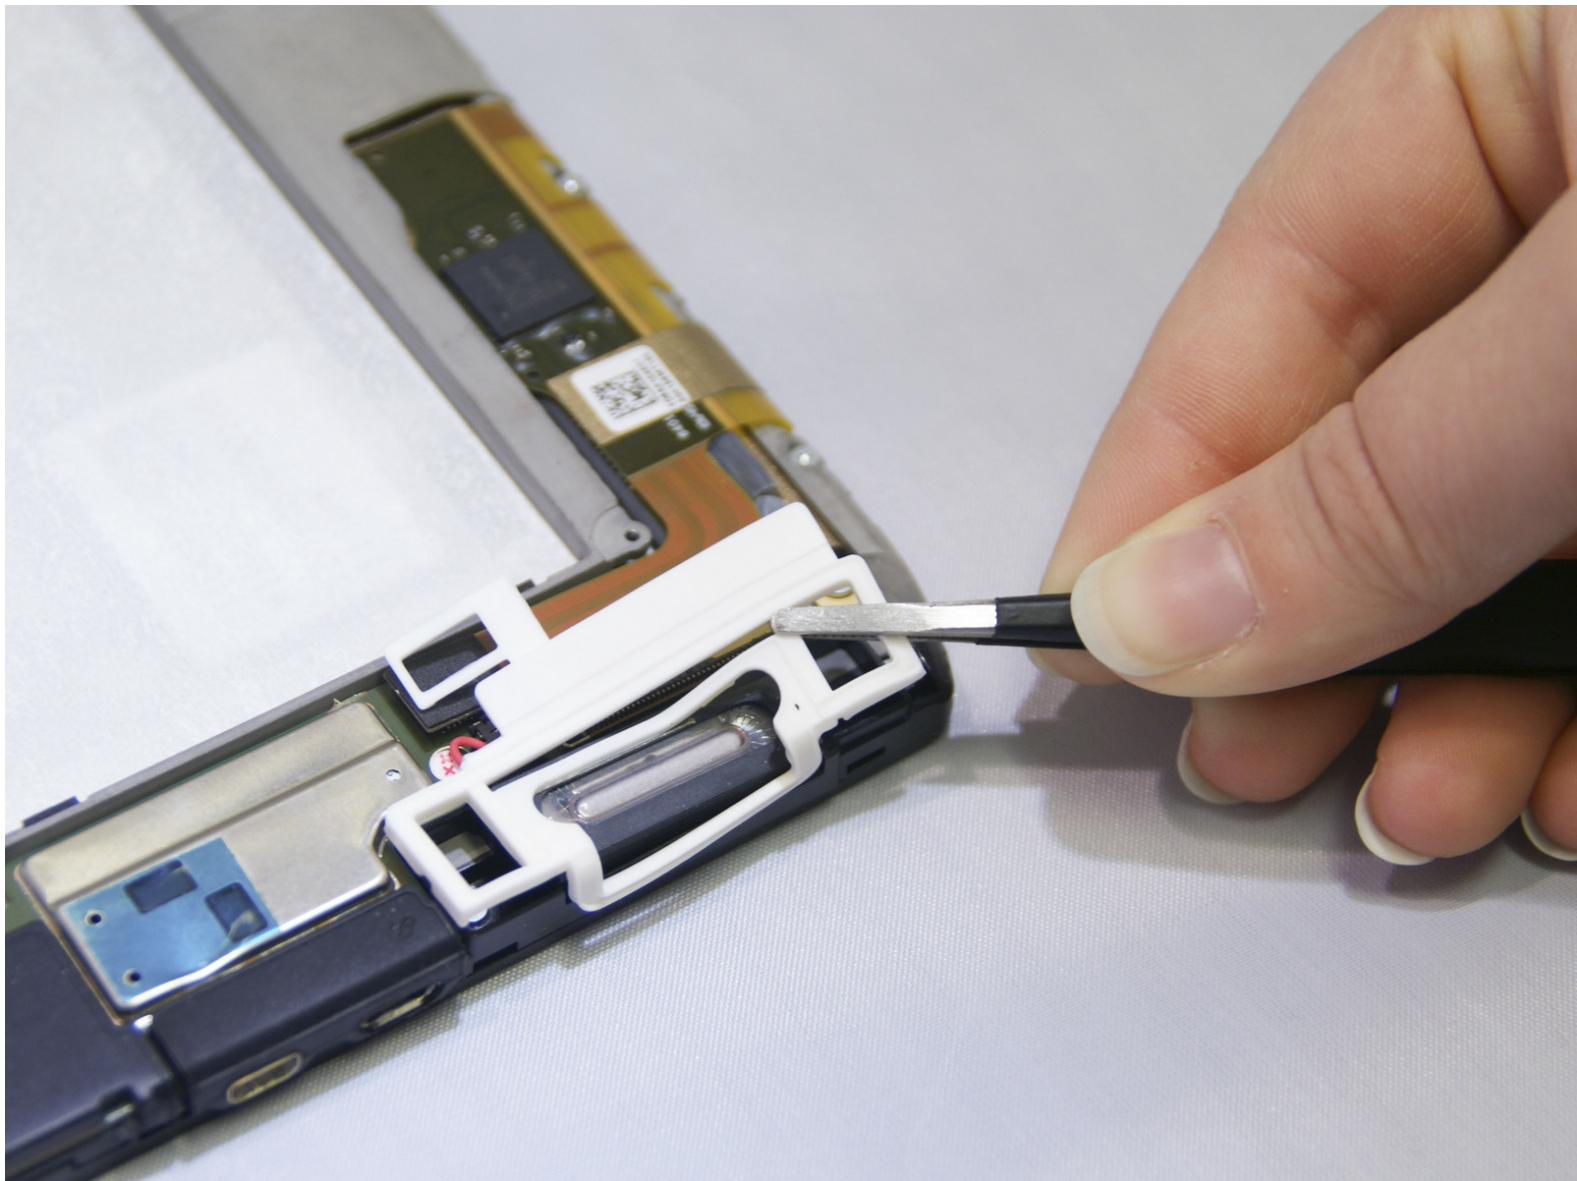

INTRODUCTION

Is your microphone not working? Here is a guide to replace the microphone. You will need to purchase a new microphone before beginning.



TOOLS:

- [iFixit Opening Tools](#) (1)
 - [T3 Torx Screwdriver](#) (1)
 - [Tweezers](#) (1)
-


Step 1 — Motorola XOOM 2 Media Edition Disassembly



i Power off the device before beginning disassembly.

- Remove six 2.7mm Torx #3 screws.

Step 2

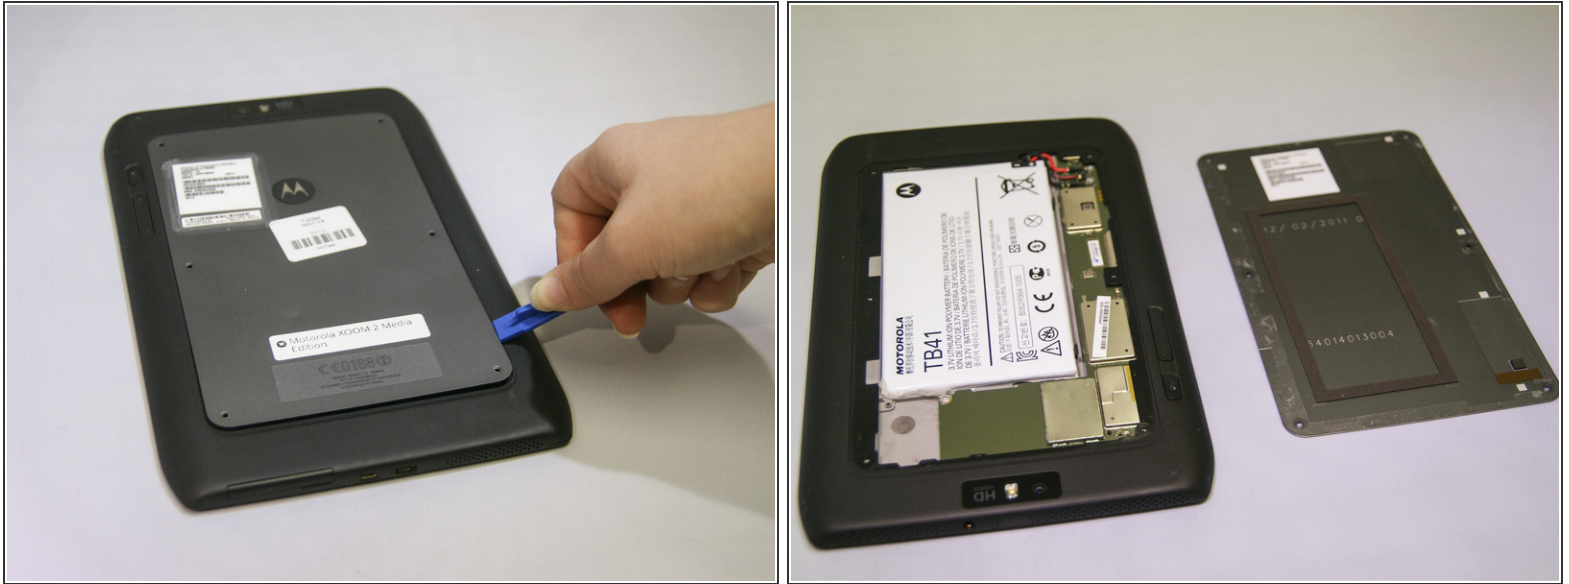

⚠ There is adhesive attached to the underside of the back panel. Gradually lift the panel to avoid bending it out of shape.


- Pry off the back panel using a plastic opening tool.
- Using a plastic opening tool, slide the tool gently around the back cover to lift the cover off.

Step 3




- Pry off the black cover gradually using a plastic opening tool.

Step 4 — Microphone

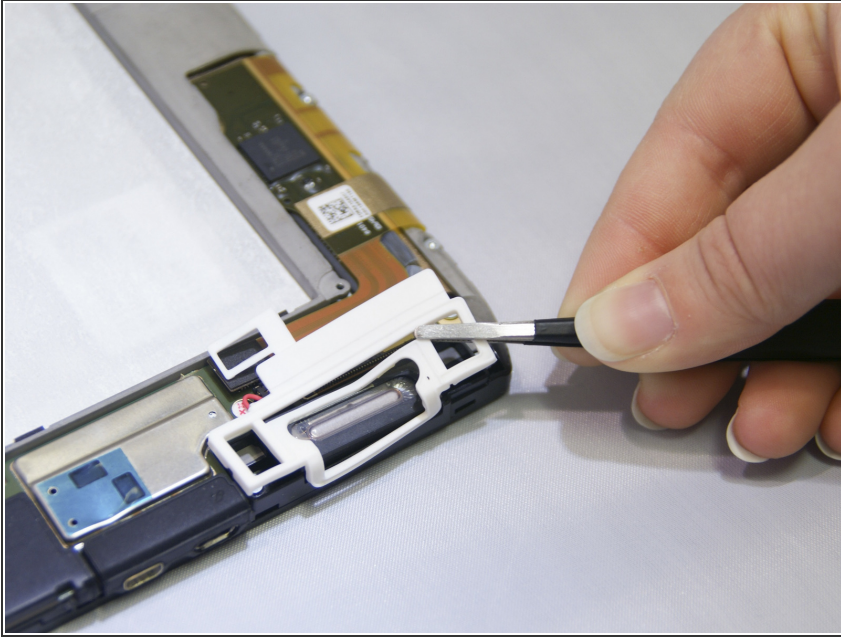



- Gently pull up rubber housing with tweezers from above microphone.
- ⓘ There is adhesive holding down the rubber microphone housing.

Step 5

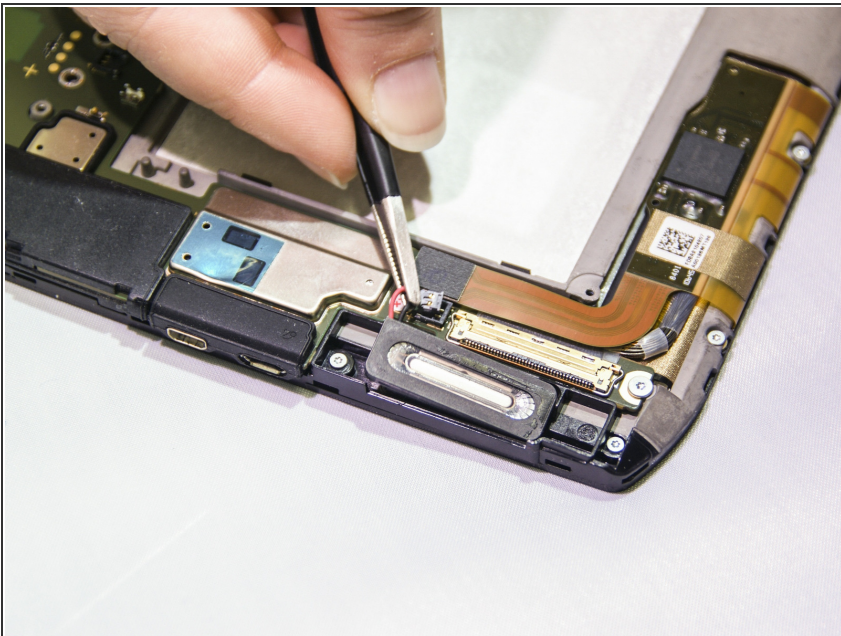

- Using the tweezers, gently pull up the connector off the microphone.

Step 6

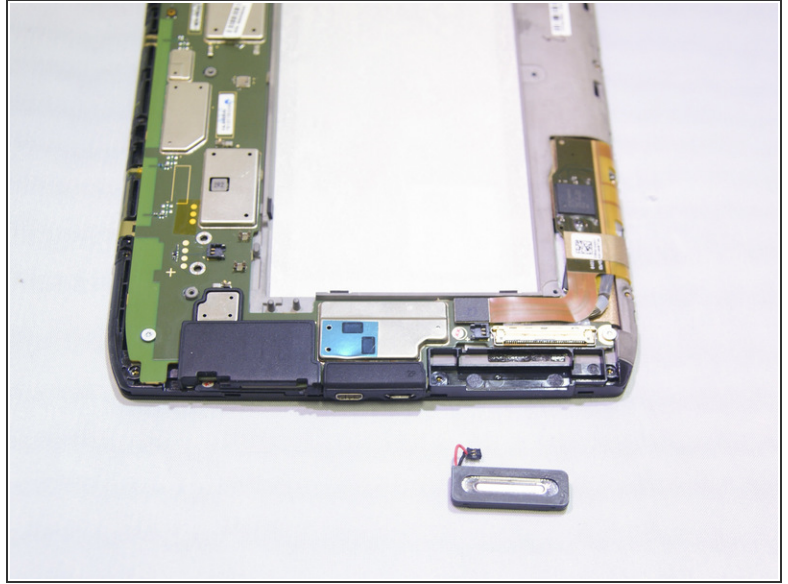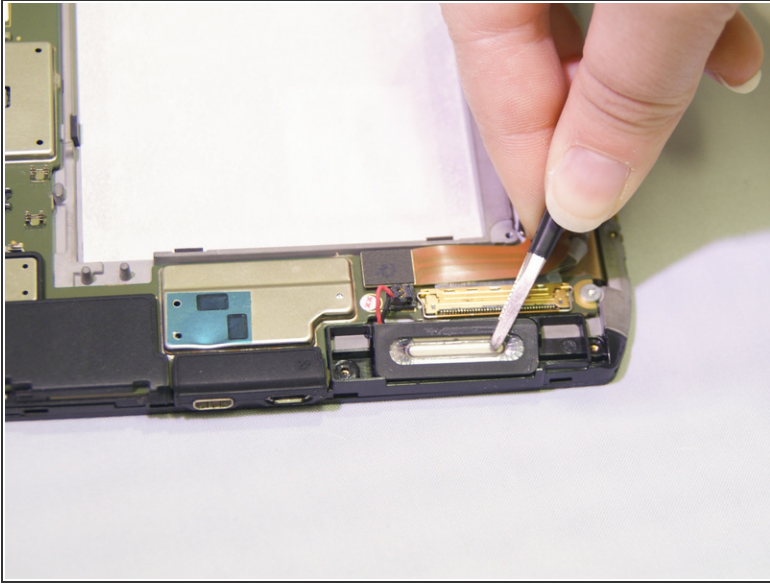

- Once the connector is removed, use the tweezers to pull up the microphone from its plastic socket.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-21 09:40:50 AM.